

SoftGlo | 15W



Housing Colors

BL

WH

Color Temperatures

3000K

4000K

Electrical Specification

Input AC Voltage (V)	ACC200-220V
Frequency (Hz)	50 Hz
Driver operating Voltage	350mA 36V DC
Power Factor	>0.95
Current THD	<10%
Driver Efficiency	>85%
Inbuilt Surge Protection	3KV

Optical Parameters

Primary Reflector	White optics
Diffuser	Premium high-transmission opal
Beam Angle	98° general diffuse
UGR	<24
Beam Direction	Fixed

Product Material

Pressure Die Cast Heat Sink & Aluminum Front Ring


LED Parameters

CRI	>90
Binning	3 Step MacAdam
LED Lifetime	>50000hrs
Lumen output	1548LM@3000K, 1590LM@4000K
LED Chip	LED Array 36Vdc/350mA
LED Wattage	12.4W
System Wattage	14,2W

Ordering Code

	Body Finish	CCT
SoftyGlo - 15W -	BL	3000K
Modify ordering code from given options:	WH	4000K / TW

Can be made IP65 on request

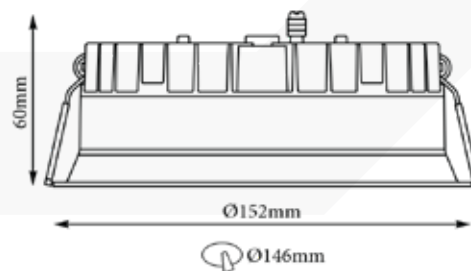

Platforms/Protocols supported

CASAMBI

Safety & General Features

Rohs - Lead Free Solder | Wires - Multi Core DC Output wire with connections Fire Retardant DC Wire | Operating Ambient Temperature - 10° to 50°C

Ingress Protection - IP20 (optional - IP65) | Mounting Parameters - Recess Mounting for Ceiling with Toggle option