

Henri | 8W

Housing Colors

BL

GR

Color Temperatures

3000K

4000K

Electrical Specification

Input AC Voltage (V)	ACC200-220V
Frequency (Hz)	50 Hz
Power Factor	>0.95
Current THD	<10%
Driver Efficiency	>85%
Inbuilt Surge Protection	3KV

Optical Parameters

Primary Optics	Polycarbonate Lens
Secondary Optics	-
Beam angle	85°
Beam Direction	Fixed

Product Material

Extruded Aluminium, Die Cast Aluminium

LED Parameters

CRI	>80
Binning	3 Step MacAdam
LED Lifetime	>50,000hrs
Lumen Output	566LM@3000K, 592LM@4000K
LED Chip	Mid power LED array 32V-36Vdc/200mA
LED Wattage	7.6W
System Wattage	8.7W


Ordering Code

Henri - 8W - Finish BL - CCT 3000K

Modify ordering code
from given options:

GR

4000K

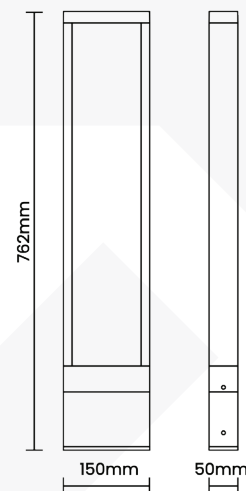

Safety & General Features

Rohs - Lead Free Solder | **Wires** - Multi Core DC Output wire with connections Fire Retardant DC Wire |
Operating Ambient Temperature - 0° to 50°C | **Ingress Protection** - IP65