

Snap Dark 12 | 15W



Housing Colors

BL

WH

Color Temperatures

3000K

4000K

TW

Electrical Specification

Input AC Voltage (V)	ACC200-220V
Frequency (Hz)	50 Hz
Driver operating Voltage	350mA 36V DC
Power Factor	>0.95
Current THD	<10%
Driver Efficiency	>85%
Inbuilt Surge Protection	3KV

Optical Parameters



Primary	PC Metallised reflector
Secondary Reflector	Black Raster – ABS
Beam Angle	22°/34°/46°
UGR	<11
Beam Direction	Fixed

Product Material

Pressure Die Cast Heat Sink & Aluminum Front Ring

LED Parameters

CRI	>90
Binning	3 Step MacAdam
LED Lifetime	>50000hrs
Lumen output (for 36°)	1485LM@3000K, 1558LM@4000K
LED Chip	COB 36Vdc/350mA
LED Wattage	12.8W
System Wattage	14.7W

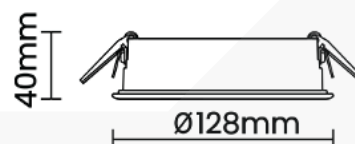

Ø119mm

Platforms/Protocols supported



Ordering Code

	Body Finish	CCT	Beam Angle
SNAP - 15W -	BL	3000K	22°
Modify ordering code from given options:			
	WH	4000K / TW	34°/46°

Safety & General Features

Rohs - Lead Free Solder | **Wires** - Multi Core DC Output wire with connections Fire Retardant DC Wire | **Operating Ambient Temperature** - 10° to 50°C
Ingress Protection - IP20 | **Mounting Parameters** - Recess Mounting for Ceiling with Toggle option