

Housing Colors

WH

Color Temperatures

3000K

4000K

Electrical Specification

Input AC Voltage (V)	ACC200-220V
Frequency (Hz)	50 Hz
Power Factor	>0.95
Current THD	<10%
Driver Efficiency	>85%
Inbuilt Surge Protection	3KV

Optical Parameters

Primary Optics	PMMA, Tempered Glass Visor
Secondary Optics	-
Beam angle	21°x9° REC
Beam Direction	Adjustable

Product Material

Extruded Aluminium, Die Cast Aluminium

LED Parameters

CRI	>90
Binning	3 Step MacAdam
LED Lifetime	>50,000hrs
LED Used	SMD High Power



Wattage	Output@3000K	Output@4000K	LED power/System power
10W	706lm	764lm	8.5/9.8W
20W	1438lm	1556lm	17.1/19.7W
40W	2606lm	2824lm	31.5/36.2W

Ordering Code

	Length - Power	CCT
iGraz	30 - 10W	3000K
Modify order-	60 - 20W	4000K
ing code:	120 - 40W	

Safety & General Features

Rohs - Lead Free Solder | Wires - Multi Core DC Output wire with connections Fire Retardant DC Wire |
Operating Ambient Temperature - 0° to 50°C | Ingress Protection - IP65

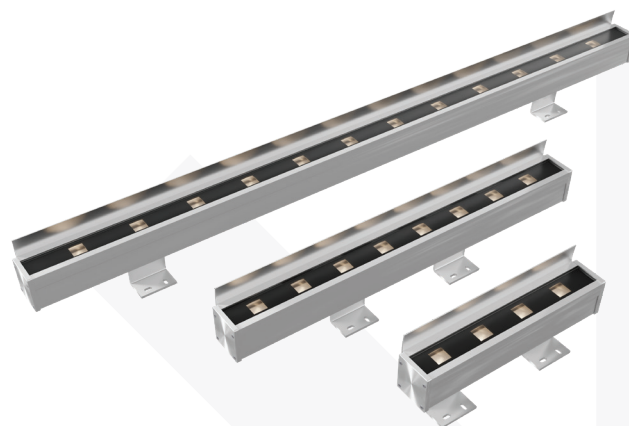

Available lengths:
310mm @ 10W
610mm @ 20W
1210mm @ 40W