

Wally

6W | 10W | 15W

Housing Colors

BL

WH

Color Temperatures

3000K

4000K

Electrical Specification

Input AC Voltage (V)	ACC200-220V
Frequency (Hz)	50 Hz
Power Factor	>0.95
Current THD	<10%
Driver Efficiency	>85%
Inbuilt Surge Protection	3KV

Optical Parameters

Optics	Premium high-transmission opal diffuser
Beam angle	-
Beam Direction	Fixed

Product Material

Die Cast Aluminium

LED Parameters

CRI	>80
Binning	3 Step MacAdam
LED Lifetime	>50,000hrs

Wattage	Output@3000K	Output@4000K	LED used	LED power/System power
6W	283lm	295lm	Mid Power LED Array 33-36Vdc/150mA	5.1/5.9W
10W	443lm	464lm	Mid Power LED Array 33-36Vdc/250mA	9.0/10.3W
15W	590lm	619lm	Mid Power LED Array 33-36Vdc/350mA	12.5/14.4W

Ordering Code



	Power	Finish	CCT
Wally	-	8W -	BL - 3000K

Modify ordering code
from given options:

10W/15W

WH

4000K

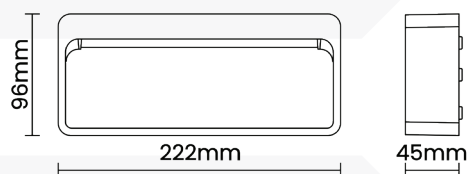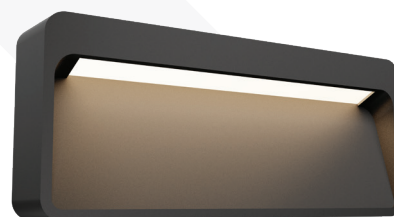

Safety & General Features

Rohs - Lead Free Solder | Wires - Multi Core DC Output wire with connections Fire Retardant DC Wire |
Operating Ambient Temperature - 0° to 50°C | Ingress Protection - IP65