


# Luma SR 35 | 8W



Housing Colors



Color Temperatures



## Electrical Specification

Input AC Voltage (V)	ACC200-220V
Frequency (Hz)	50 Hz
Driver operating Voltage	200mA 36V DC
Power Factor	>0.95
Current THD	<10%
Driver Efficiency	>85%
Inbuilt Surge Protection	3KV

## Optical Parameters

Primary Reflector	PC Metallised
Secondary Reflector	-
Beam Angle	37°/58°
UGR	<23
Beam Direction	Adjustable

## Product Material

Die Cast Aluminium, Milled Aluminium

## LED Parameters


CRI	>90
Binning	3 Step MacAdam
LED Lifetime	>50000hrs
Lumen output (for 27)	935LM@3000K, 992LM@4000K
LED Chip	COB 36Vdc/200mA
LED Wattage	7.1W
System Wattage	8.2W

## Ordering Code

	Body Finish	CCT	Beam Angle
LUMA SR 35 - 8W -	BL	3000K	37°

Modify ordering code from given options:

WH	4000K/TW	58°
----	----------	-----

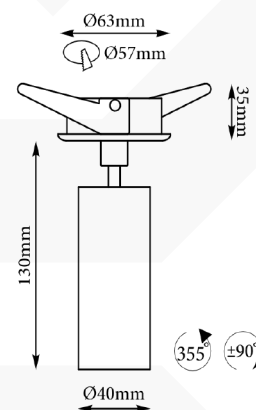

## Platforms supported



## Protocols supported



## Safety & General Features

Rohs - Lead Free Solder | Wires - Multi Core DC Output wire with connections Fire Retardant DC Wire | Operating Ambient Temperature - 10° to 50°C  
Ingress Protection - IP20 | Mounting Parameters - Semi-recessed mounting for ceiling, designed for a clean finish and easy, secure installation.