

# Bloom Dark Pendant | 14W



Housing Colors

BL

WH

Color Temperatures

3000K

4000K

## Electrical Specification

Input AC Voltage (V)	ACC200-220V
Frequency (Hz)	50 Hz
Driver operating Voltage	350mA 36V DC
Power Factor	>0.95
Current THD	<10%
Driver Efficiency	>85%
Inbuilt Surge Protection	3KV

## Optical Parameters

Primary Optics	PMMA Lens, PC Metallised Reflector
Secondary Optics	Anodised Reflector
Beam Angle	46°
UGR	<19
Beam Direction	Fixed

## Product Material



Extruded Aluminium Housing & Aluminium Heat Sink

## LED Parameters

CRI	>90
Binning	3 Step MacAdam
LED Lifetime	>50000hrs
Lumen output	1106LM@3000K, 1162LM@4000K
LED Chip	Mid Power LED 33-36Vdc/350mA
LED Wattage	12.2W
System Wattage	14.0W

## Ordering Code

	Body Finish	CCT
Bloom Dark S - 14W -	BL	3000K
<small>Modify ordering code from given options:</small>	WH	4000K

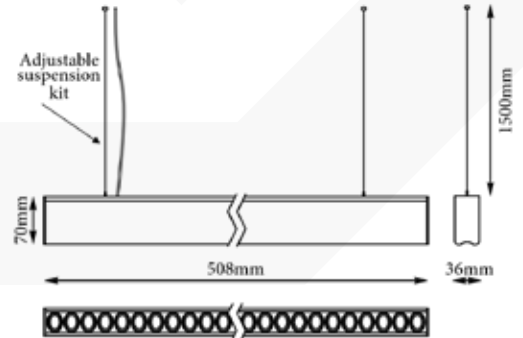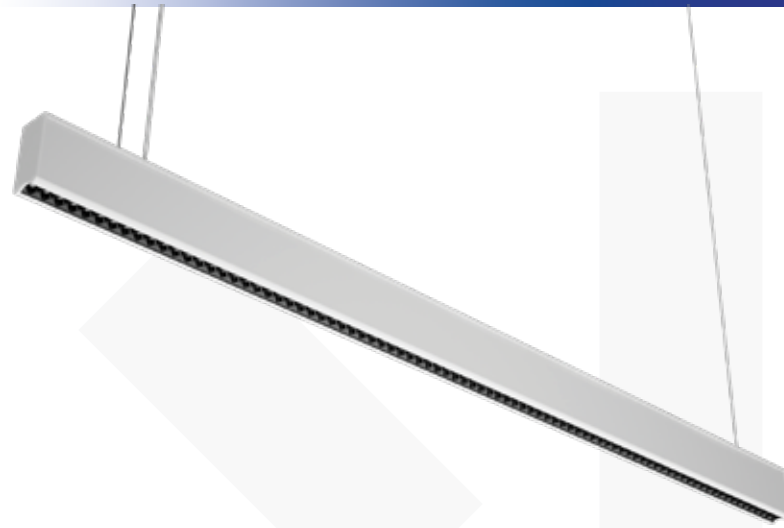

## Platforms supported



## Safety & General Features

Rohs - Lead Free Solder | Wires - Multi Core DC Output wire with connections Fire Retardant DC Wire | Operating Ambient Temperature - 10° to 50°C  
Ingress Protection - IP20 | Mounting Parameters - Pendant Mounting for Ceiling with Length option.