

Roxy AR | 12W



Housing Colors

BL

WH

Color Temperatures

3000K

4000K

Electrical Specification

Input AC Voltage (V)	ACC200-220V
Frequency (Hz)	50 Hz
Driver operating Voltage	300mA 36V DC
Power Factor	>0.95
Current THD	<10%
Driver Efficiency	>85%
Inbuilt Surge Protection	3KV

Optical Parameters

Primary Reflector	Lens optics
Secondary Reflector	Aluminium - White(WHS)/Black(BLS) Gunmetal (GM)/Chrome (CH)/Gold (G)
Beam Angle	21°/27°/34°/47°
UGR	<16
Beam Direction	Adjustable

Product Material


Aluminum Extrusion Heat Sink & Aluminum Front Ring

LED Parameters

CRI	>90
Binning	3 Step MacAdam
LED Lifetime	>50000hrs
Lumen output (for 34°)	1258LM@3000K, 1319LM@4000K
LED Chip	COB 36Vdc/300mA
LED Wattage	10.5W
System Wattage	12.1W

Ordering Code

	Body Finish	CCT	Beam Angle	Sec. Reflector
RXY AR - 12W	BL	3000K	21°	WHS
Modify ordering code from given options:				
	WH	4000K/TW	27°/34°/47°	BLS

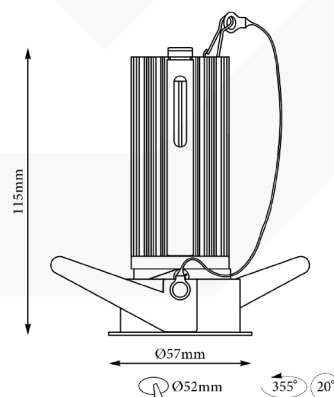

Platforms/Protocols supported



Safety & General Features

Rohs - Lead Free Solder | Wires - Multi Core DC Output wire with connections Fire Retardant DC Wire | Operating Ambient Temperature - 10° to 50°C
Ingress Protection - IP20 | Mounting Parameters - Recess Mounting for Ceiling with Toggle option