


# SoftGlo | 20W



Housing Colors



Color Temperatures



## Electrical Specification

Input AC Voltage (V)	ACC200-220V
Frequency (Hz)	50 Hz
Driver operating Voltage	500mA 36V DC
Power Factor	>0.95
Current THD	<10%
Driver Efficiency	>85%
Inbuilt Surge Protection	3KV

## Optical Parameters

Primary Reflector	White optics
Diffuser	Premium high-transmission opal
Beam Angle	98° general diffuse
UGR	<25
Beam Direction	Fixed

## Product Material

Pressure Die Cast Heat Sink & Aluminum Front Ring



## LED Parameters

CRI	>90
Binning	3 Step MacAdam
LED Lifetime	>50000hrs
Lumen output	2099LM@3000K, 2198LM@4000K
LED Chip	LED Array 36Vdc/500mA
LED Wattage	17.2W
System Wattage	19.8W

## Ordering Code

SoftGlo - 20W - BL - 3000K  
Modify ordering code from given options: WH 4000K / TW

Can be made IP65 on request

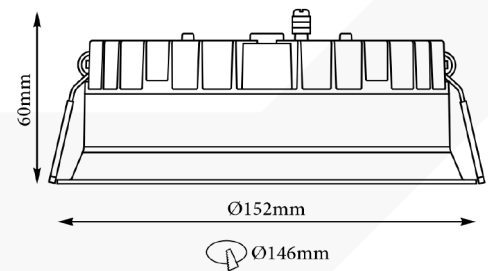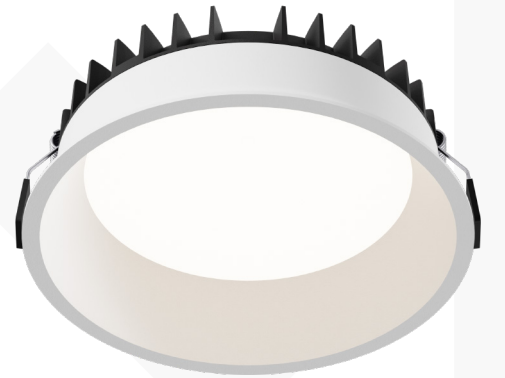

## Platforms supported



## Protocols supported



## Safety & General Features

Rohs - Lead Free Solder | Wires - Multi Core DC Output wire with connections Fire Retardant DC Wire | Operating Ambient Temperature - 10° to 50°C  
Ingress Protection - IP20 (optional - IP65) | Mounting Parameters - Recess Mounting for Ceiling with Toggle option