


Luma S 35 | 10W



Housing Colors



Color Temperatures



Electrical Specification

Input AC Voltage (V)	ACC200-220V
Frequency (Hz)	50 Hz
Driver operating Voltage	250mA 36V DC
Power Factor	>0.95
Current THD	<10%
Driver Efficiency	>85%
Inbuilt Surge Protection	3KV

Optical Parameters


Primary Reflector	PC Metallised
Secondary Reflector	-
Beam Angle	37°/58°
UGR	<24
Beam Direction	Adjustable

Product Material

Die Cast Aluminium, Milled Aluminium

LED Parameters

CRI	>90
Binning	3 Step MacAdam
LED Lifetime	>50000hrs
Lumen output (for 27)	1119LM@3000K, 1188LM@4000K
LED Chip	COB 36Vdc/250mA
LED Wattage	8.6W
System Wattage	9.9W

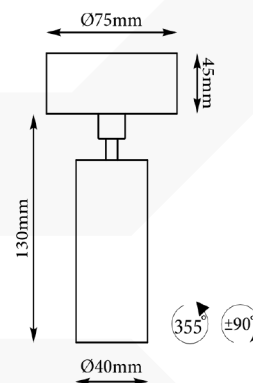

Ordering Code

	Body Finish	CCT	Beam Angle
LUMA S 35 - 10W -	<u>BL</u>	<u>3000K</u>	<u>37°</u>
<small>Modify ordering code from given options:</small>	WH	4000K/TW	58°

Platforms supported



Protocols supported



Safety & General Features

Rohs - Lead Free Solder | Wires - Multi Core DC Output wire with connections Fire Retardant DC Wire | Operating Ambient Temperature - 10° to 50°C
Ingress Protection - IP20 | Mounting Parameters - Surface-mounted configuration suitable for ceiling application.