


# SoftGlo | 24W



Housing Colors



Color Temperatures



## Electrical Specification

Input AC Voltage (V)	ACC200-220V
Frequency (Hz)	50 Hz
Driver operating Voltage	600mA 36V DC
Power Factor	>0.95
Current THD	<10%
Driver Efficiency	>85%
Inbuilt Surge Protection	3KV

## Optical Parameters

Primary Reflector	White optics
Diffuser	Premium high-transmission opal
Beam Angle	98° general diffuse
UGR	<26
Beam Direction	Fixed

## Product Material

Pressure Die Cast Heat Sink & Aluminum Front Ring



## LED Parameters

CRI	>90
Binning	3 Step MacAdam
LED Lifetime	>50000hrs
Lumen output	2387LM@3000K, 2504LM@4000K
LED Chip	LED Array 36Vdc/600mA
LED Wattage	20.4W
System Wattage	23.4W

## Ordering Code

	Body Finish	CCT
SoftGlo - 24W -	<u>BL</u>	<u>3000K</u>
<small>Modify ordering code from given options:</small>	WH	4000K / TW

Can be made IP65 on request

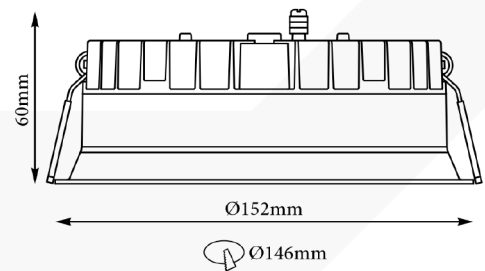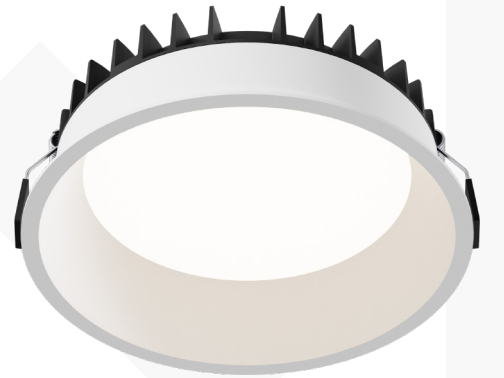

## Platforms supported



## Protocols supported



## Safety & General Features

Rohs - Lead Free Solder | Wires - Multi Core DC Output wire with connections Fire Retardant DC Wire | Operating Ambient Temperature - 10° to 50°C  
Ingress Protection - IP20 (optional - IP65) | Mounting Parameters - Recess Mounting for Ceiling with Toggle option