

Roxy 2Way | 2x12W



Housing Colors **BL** **WH**
 Color Temperatures **3000K** **4000K**

Electrical Specification

Input AC Voltage (V) ACC200-220V
 Frequency (Hz) 50 Hz
 Driver operating Voltage 300mA 36V DC
 Power Factor >0.95
 Current THD <10%
 Driver Efficiency >85%
 Inbuilt Surge Protection 3KV

Optical Parameters

Primary Reflector Lens optics
 Secondary Reflector Aluminium - White(WHS)/Black(BLS)
 Gunmetal (GM)/Chrome (CH)/Gold (G)
 Beam Angle 21°/27°/34°/47°
 UGR <17
 Beam Direction Fixed

Product Material




Aluminum Extrusion Heat Sink & Aluminum Front Ring

LED Parameters

CRI >90
 Binning 3 Step MacAdam
 LED Lifetime >50000hrs
 Lumen output (for 27°) 2x1244LM@3000K, 2x1305LM@4000K
 LED Chip COB 36Vdc/300mA
 LED Wattage 2x10.6W
 System Wattage 2x12.2W

Ordering Code

	Body Finish	CCT	Beam Angle	Sec. Reflector
RXY 2Way - 2x12W -	<u>BL</u>	<u>3000K</u>	<u>21°</u>	<u>WHS</u>
<small>Modify ordering code from given options:</small>	WH	4000K	27°/34°/47°	BLS

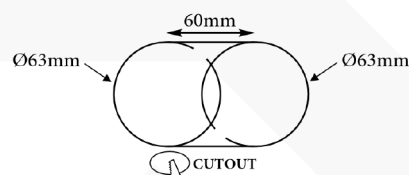

Platforms supported



Protocols supported



Safety & General Features

Rohs - Lead Free Solder | Wires - Multi Core DC Output wire with connections Fire Retardant DC Wire | Operating Ambient Temperature - 10° to 50°C
 Ingress Protection - IP20 | Mounting Parameters - Recess Mounting for Ceiling with Toggle option