

Orion 2Way | 2x15W



Housing Colors

BL

WH

Color Temperatures

3000K

4000K



Electrical Specification

Input AC Voltage (V)	ACC200-220V
Frequency (Hz)	50 Hz
Driver operating Voltage	350mA 36V DC
Power Factor	>0.95
Current THD	<10%
Driver Efficiency	>85%
Inbuilt Surge Protection	3KV

Optical Parameters

Primary Reflector	Lens optics
Secondary Reflector	Aluminium - White(WHS)/Black(BLS)
Beam Angle	24°/33°/50°
UGR	<17
Beam Direction	Adjustable 25°

Product Material


Aluminum Extrusion Heat Sink & Aluminum Front Ring

LED Parameters

CRI	>90
Binning	3 Step MacAdam
LED Lifetime	>50000hrs
Lumen output (for 24°)	2x1258LM@3000K, 2x1317LM@4000K
LED Chip	COB 36Vdc/350mA
LED Wattage	2x12.9W
System Wattage	2x14.8W

Ordering Code

	Body Finish	CCT	Beam Angle	Sec. Reflector
ORI 2Way - 2x15W -	BL	3000K	24°	WHS
Modify ordering code from given options:	WH	4000K/TW	33°/50°	BLS

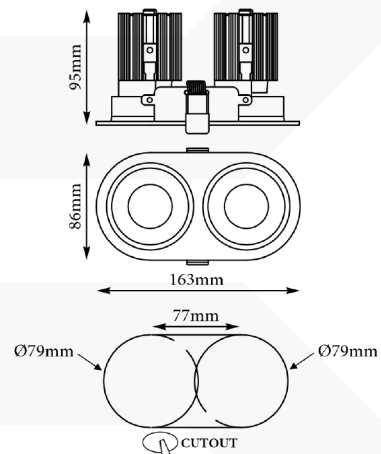

Platforms/Protocols supported



Safety & General Features

Rohs - Lead Free Solder | Wires - Multi Core DC Output wire with connections Fire Retardant DC Wire | Operating Ambient Temperature - 10° to 50°C
Ingress Protection - IP20 | Mounting Parameters - Recess Mounting for Ceiling with Toggle option