

SoftGlo | 12W



Housing Colors

BL

WH

Color Temperatures

3000K

4000K



Electrical Specification

Input AC Voltage (V)	ACC200-220V
Frequency (Hz)	50 Hz
Driver operating Voltage	300mA 36V DC
Power Factor	>0.95
Current THD	<10%
Driver Efficiency	>85%
Inbuilt Surge Protection	3KV

Optical Parameters

Primary Reflector	White optics
Diffuser	Premium high-transmission opal
Beam Angle	94° general diffuse
UGR	<25
Beam Direction	Fixed

Product Material



Pressure Die Cast Heat Sink & Aluminum Front Ring

LED Parameters

CRI	>90
Binning	3 Step MacAdam
LED Lifetime	>50000hrs
Lumen output	1252LM@3000K, 1310LM@4000K
LED Chip	LED Array 36Vdc/300mA
LED Wattage	10.2W
System Wattage	11.7W

Ordering Code		
	Body Finish	CCT
SoftGlo - 12W -	<u>BL</u>	<u>3000K</u>
<small>Modify ordering code from given options:</small>	WH	4000K / TW

Can be made IP65 on request

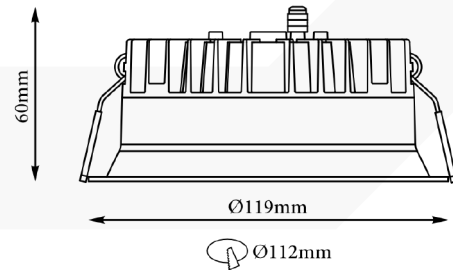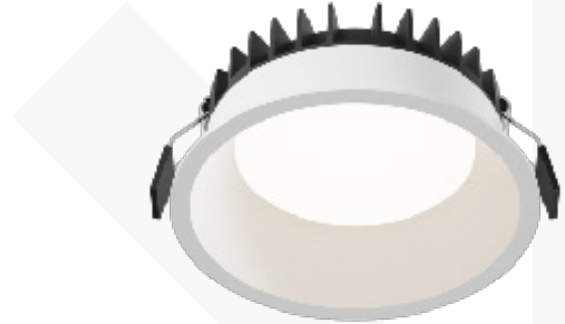

Platforms supported



Protocols supported



Safety & General Features

Rohs - Lead Free Solder | Wires - Multi Core DC Output wire with connections Fire Retardant DC Wire | Operating Ambient Temperature - 10° to 50°C
Ingress Protection - IP20 (optional - IP65) | Mounting Parameters - Recess Mounting for Ceiling with Toggle option