


# Cylux P OPD | 14W



Housing Colors



Color Temperatures



## Electrical Specification

Input AC Voltage (V)	ACC200-220V
Frequency (Hz)	50 Hz
Driver operating Voltage	350mA 36V DC
Power Factor	>0.95
Current THD	<10%
Driver Efficiency	>85%
Inbuilt Surge Protection	3KV

## Optical Parameters

Primary Reflector	Reflector - White optics
Diffuser	Opal PC
Beam Angle	88°
UGR	<29
Beam Direction	Fixed

## Product Material


Die Cast Aluminium, Milled Aluminium

## LED Parameters

CRI	>90
Binning	3 Step MacAdam
LED Lifetime	>50000hrs
Lumen output (for 27)	1340LM@3000K, 1410LM@4000K
LED Chip	Mid power LED array 32V-36Vdc/350mA
LED Wattage	12.3W
System Wattage	14.1W

## Ordering Code

	Body Finish	CCT	Beam Angle
Cylux P OPD - 14W	- <u>BL</u>	- <u>3000K</u>	- <u>88°</u>
<small>Modify ordering code from given options:</small>	WH	4000K/TW	

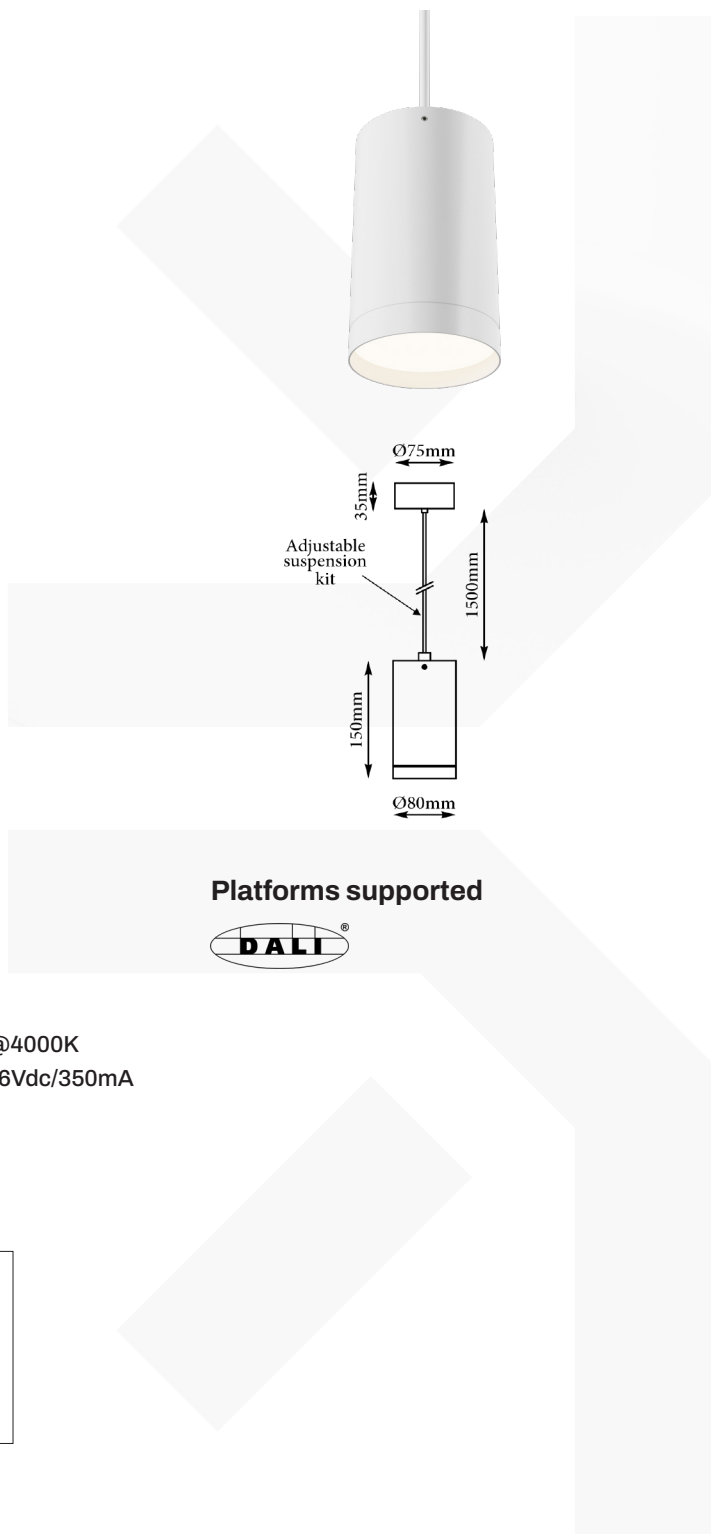

## Safety & General Features

Rohs - Lead Free Solder | Wires - Multi Core DC Output wire with connections Fire Retardant DC Wire | Operating Ambient Temperature - 10° to 50°C  
Ingress Protection - IP20 | Mounting Parameters - Pendant Mounting for Ceiling with Length option.